


Survi'VR Series Vandal-Resistant Luminaire (13" Round Shallow Wall Mount)

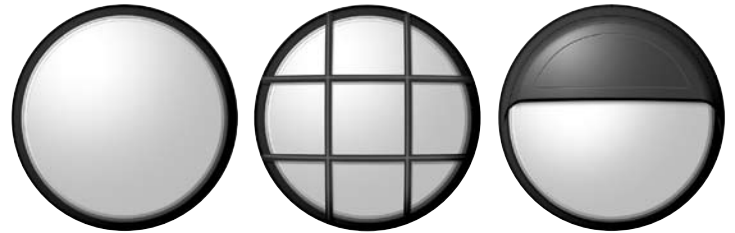

ORDERING INFORMATION

Catalog Number: Example: SR3SW113HFLB8GCB


S	R	3	S	W	113	HF	L	B	8	G	C	B
Series S= Survi'VR	Shape R= Round	Size 3=13"	Depth S= Shallow	Mounting W=Wall	Wattage 113=1x13 118=1x18 126=1x26 132=1x32 142=1x42 213=2x13 218=2x18 226=2x26	Source HF=Compact Fluorescent (HPF)	Options L=Lamped E=Emergency (1 or 2) 13w (1 or 2) 18w F=Fusing	Base Color* B=Black W=White P=Bronze	Voltage 8=120-277	Style B=Open Bezel G=Grid E=Closed Eyelid	Lens O=Opal C=Clear A=Acrylic ^{1,2}	Face Color B=Black W=White P=Bronze

¹ Available in reduced wattages. Consult factory.


² Not recommended for use in high-abuse areas.

*Custom colors available. Consult factory.

TECHNICAL INFORMATION

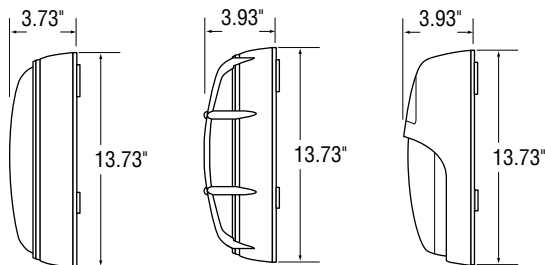

Mounting Height = 8 ft.
Gridscale = 8 ft. per increment

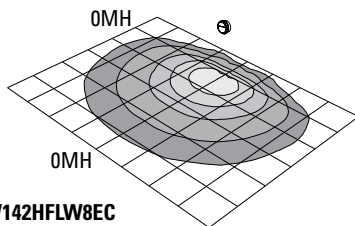

SR3SW142HFLW8EC
13" Shallow Closed Eyelid
42w compact fluorescent

Horizontal Footcandles
Lumen/Lamp = 3,200
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

- Precision die-cast 360 alloy marine-grade aluminum back plate with cast-in mounting knock-outs.
- Finished in Duraplex II polyester powder coat.
- One-piece injection molded and UV-stabilized polycarbonate face with snap-in, interlocking lens provision.
- Color molded into the polycarbonate face for durable, scratch-resistant finish.
- Locking recessed set screw at the 1:00 o'clock position is unobtrusive, securely locking the face and lens to the cast housing.
- Die-cut neoprene rubber gasket provides added protection against elements between back casting and mounting surface.
- Silicone rubber gasket seals optics/face styles to outer rim of back casting. Also acts as a shock absorber providing additional support against breakage.
- Compact fluorescent units equipped with an electronic HPF ballast with 120-277 voltage sensing capability.
- Lens is a one-piece, injection-molded, UV-stabilized polycarbonate.
- Internal prisms re-direct the light minimizing hot spots and maximizing uniformity.
- Available in either clear prismatic or opal prismatic polycarbonate.
- Twist and seal construction locks the lens and face onto the back casting.
- Extruded silicone gasket provides a tight weather-resistant seal. Unique "Shock and Seal" design provides a cushion that supports/seals the lens against the elements and also acts as a shock absorber to help reduce damage from impact to the unit face.
- Compact Fluorescent units equipped with a high reflectance white pan reflector system.
- Wall-mounted units equipped with additional kick plates to direct the light down and out into a Type III pattern with a minimum 4:1 spacing ratio.
- UL listed for wet locations.

