


Survi'VR Series

Vandal-Resistant Luminaire

(16" Round Shallow Ceiling Mount)

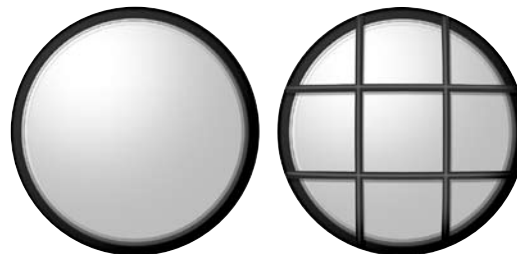


ORDERING INFORMATION

Catalog Number: Example: SR6SC70PMFB8GCB


S	R	6	S	C	70	PM	F	B	8	G	C	W
Series S= Survi'VR	Shape R= Round	Size 6=16"	Depth S= Shallow	Mounting C=Ceiling	Wattage 50=50 70=70 126=1x26 132=1x32 142=1x42 226=2x26 232=2x32 242=2x42 326=3x26	Source LX=HPS PM=PS MH NX=HPS (NPF) ¹ HF=Compact Fluorescent (HPF)	Options L=Lamped E=Emergency (1) 42w (1 or 2) 26w (1) 32w (2) 18w U=UV Shield 2 Q=Quartz Aux F=Fusing T=Thru Wiring ³ PC=Photo Control ³	Base Color* B=Black W=White P=Bronze	Voltage 1=120 8=120-277	Style B=Open Bezel G=Grid	Lens O=Opal C=Clear A=Acrylic ^{4,5}	Face Color B=Black W=White P=Bronze

¹ 120V only.
² For MH lamps only.
³ Unavailable with trim rings.
⁴ Available in reduced wattages (50w max. MH/HPS). Consult factory.
⁵ Not recommended for use in high-abuse areas.
 *Custom colors available. Consult factory.

TECHNICAL INFORMATION

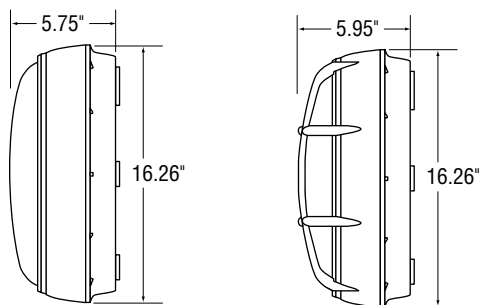

Mounting Height = 10 ft.
Gridscale = 10 ft. per increment

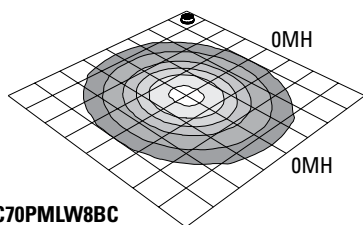

SR6SC70PMLW8BC
 16" Shallow Open Bezel
 70w metal halide

Horizontal Footcandles
 Lumen/Lamp = 4,750
 Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

- Precision die-cast 360 alloy marine-grade aluminum back plate with cast-in mounting knock-outs.
- Finished in Duraplex II polyester powder coat.
- One-piece injection molded and UV-stabilized polycarbonate face with snap-in, interlocking lens provision.
- Color molded into the polycarbonate face for durable, scratch-resistant finish.
- Locking recessed set screw at the 1:00 o'clock position is unobtrusive, securely locking the face and lens to the cast housing.
- Die-cut neoprene rubber gasket provides added protection against elements between back casting and mounting surface.
- Silicone rubber gasket seals optics/face styles to outer rim of back casting. Also acts as a shock absorber providing additional support against breakage.
- HID units equipped with magnetic ballasts.
- Compact Fluorescent units equipped with an electronic HPF ballast with 120-277 voltage sensing capability.
- Lens is a one-piece, injection-molded, UV-stabilized polycarbonate.
- Internal prisms re-direct the light minimizing hot spots and maximizing uniformity.
- Available in either clear prismatic or opal prismatic polycarbonate.
- Twist and seal construction locks the lens and face onto the back casting.
- Extruded silicone gasket provides a tight weather-resistant seal. Unique "Shock and Seal" design provides a cushion that supports/seals the lens against the elements and also acts as a shock absorber to help reduce damage from impact to the unit face.
- HID units equipped with a precision die-form segmented reflector.
- Compact Fluorescent units equipped with a high reflectance white pan reflector system.
- Wall-mounted units equipped with additional kick plates to direct the light down and out into a Type III pattern with a minimum 4:1 spacing ratio.
- UL listed for wet locations.

