

CATALOG NO. _____

TYPE NO. _____

JOB NAME _____

11-12

Survi'VR V Series Vandal-Resistant Luminaire (2' Linear Fluorescent)



11" Wide Model



7" Narrow Model


ORDERING INFORMATION

Catalog Number: Example: SVWO4241S8YBF

S								
SERIES	STYLE	LENS	LAMPS	WATTAGE	VOLTAGE	BALLAST SOURCE	COLOR	OPTIONS
S Survi'VR Series Vandal Resistant	VN -Narrow (7") VW -Wide (11")	O -Opal Poly C -Clear Poly	2 -Narrow (7") 3 -Wide (11") 4 -Wide (11")	14 -14W T5 17 -17W T8 24 -24W T5HO	1 -120V 7 -277V B -120-277V	See Ballast Matrix Below	B -Black W -White P -Bronze	2C -2 Circuit 3C -3 Circuit F -Fused PC -Photo Control Battery Back-Up Consult Factory

PHOTOMETRIC DATA

Mounting Height = 8 ft.
Gridscale = 8 ft. per increment

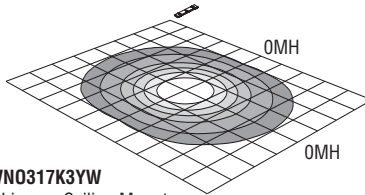

SVN0317K3YW
2' Linear - Ceiling Mount
3-17w T8 fluorescent

Horizontal Footcandles
Lumen/Lamp = 2,850
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------


BALLAST MATRIX

# Lamps	Wattage	Source	Ballast
2	14w	T5	N2Y
	17w	T8	K2Y
	24w	T5HO	S2Y
3	14w	T5	N6Y
	17w	T8	K3Y
	24w	T5HO	S6Y
4	14w	T5	N8Y
	17w	T8	K4Y
	24w	T5HO	S8Y

PRODUCT SPECIFICATIONS

- Marine-grade, extruded aluminum housing
- Tamper-resistant stainless steel hardware
- Architectural die-cast end caps
- Polyester powder, semi-gloss textured finish
- Standard color is white
- Fade-resistant color (custom colors available – consult factory)
- High-Efficiency T5, T5HO and T8 lamping
- Exceptionally high fixture efficiency
- 91.7% maintained lumens with high CRI of 85
- Extruded impact-resistant polycarbonate lens
- Delivers uniform illumination without glare
- Lens available in clear prismatic and opal prismatic
- Immediate hot re-strike
- Greater uniformity and instant-on capability
- No color shift
- Field drilling not required
- "LifeLyte" limited lifetime warranty
- UL/CUL listed for wet locations

TECHNICAL INFORMATION

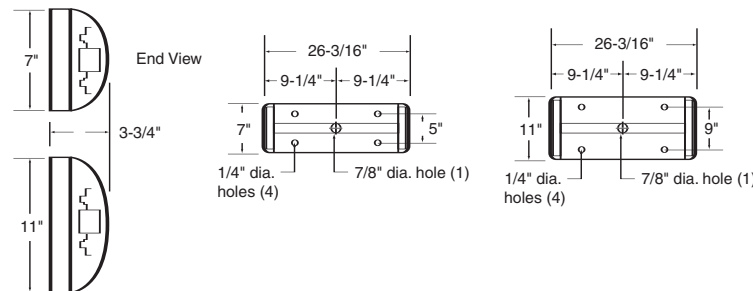

UL Damp Location Listed.
UL File Number: E86021