

CATALOG NO. \_\_\_\_\_

TYPE NO. \_\_\_\_\_

JOB NAME \_\_\_\_\_

**11-16**

# Survi'VR L Series Vandal-Resistant Luminaire (4' Linear Fluorescent)




## ORDERING INFORMATION

Catalog Number: Example: SLC2541S2YBF

<b>S</b>	<b>L</b>							
<b>SERIES</b>	<b>STYLE</b>	<b>LENS</b>	<b>LAMPS</b>	<b>WATTAGE</b>	<b>VOLTAGE</b>	<b>BALLAST SOURCE</b>	<b>COLOR</b>	<b>OPTIONS</b>
<b>S</b> Survi'VR Series Vandal Resistant	<b>L</b> L-Wide (11")	<b>O</b> -Opal Poly <b>C</b> -Clear Poly	<b>2</b>	<b>28</b> -28W T5 <b>32</b> -32W T8 <b>54</b> -54W T5HO	<b>1</b> -120V <b>7</b> -277V <b>B</b> -120-277V	<b>N2Y</b> -T5 <b>K2Y</b> -T8 <b>S2Y</b> -T5HO	<b>B</b> -Black <b>W</b> -White <b>P</b> -Bronze	<b>2C</b> -2 Circuit <b>3C</b> -3 Circuit <b>F</b> -Fused <b>RB</b> -Row Beginning <b>RM</b> -Row Middle <b>RE</b> -Row End <b>PC</b> -Photo Control <b>Battery Back-Up</b> Consult Factory

## PHOTOMETRIC DATA

Mounting Height = 8 ft.  
Gridscale = 8 ft. per increment


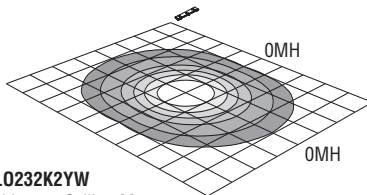


**SL0232K2YW**  
4' Linear - Ceiling Mount  
2-32w T8 fluorescent

Horizontal Footcandles  
Lumen/Lamp = 2,850  
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

## TECHNICAL INFORMATION

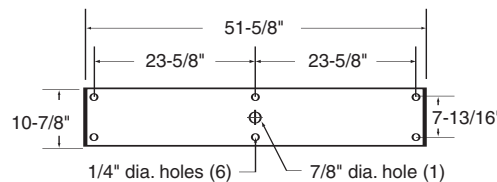

## PRODUCT SPECIFICATIONS

- Marine-grade, extruded aluminum housing
- Tamper-resistant stainless steel hardware
- Architectural die-cast end caps
- Polyester powder, semi-gloss textured finish
- Standard color is white
- Fade-resistant color (custom colors available – consult factory)
- High-Efficiency T5, T5HO and T8 lamping
- Exceptionally high fixture efficiency
- 91.7% maintained lumens with high CRI of 85
- .156" thick extruded impact-resistant polycarbonate lens
- Delivers uniform illumination without glare
- Lens available in clear prismatic and opal prismatic
- Immediate hot re-strike
- Greater uniformity and instant-on capability
- No color shift
- Field drilling not required
- "LifeLyte" limited lifetime warranty
- UL/CUL listed for wet locations

UL Damp Location Listed.  
UL File Number: E86021