

CATALOG NO. _____

TYPE NO. _____

JOB NAME _____

11-17

Survi'VR L Series Vandal-Resistant Luminaire (8' Linear Fluorescent)




ORDERING INFORMATION

Catalog Number: Example: SLTO2321K4YBF

S	L							
SERIES	STYLE	LENS	LAMPS	WATTAGE	VOLTAGE	BALLAST SOURCE	COLOR	OPTIONS
S Survi'VR Series Vandal Resistant	LT-Wide Tandem (11")	O -Opal Poly C -Clear Poly	2 (per cross section)	28-28W T5 32-32W T8 54-54W T5HO	1-120V 7-277V B-120-277V	N8Y-T5 K4Y-T8 S4Y-T5HO	B-Black W-White P-Bronze	2C-2 Circuit 3C-3 Circuit F-Fused RB-Row Beginning RM-Row Middle RE-Row End PC-Photo Control Battery Back-Up Consult Factory

PHOTOMETRIC DATA

Mounting Height = 12 ft.
Gridscale = 12 ft. per increment




SLTO232K4YW
8' Linear - Ceiling Mount
4-32w T8 fluorescent

Horizontal Footcandles
Lumen/Lamp = 2,850
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

TECHNICAL INFORMATION

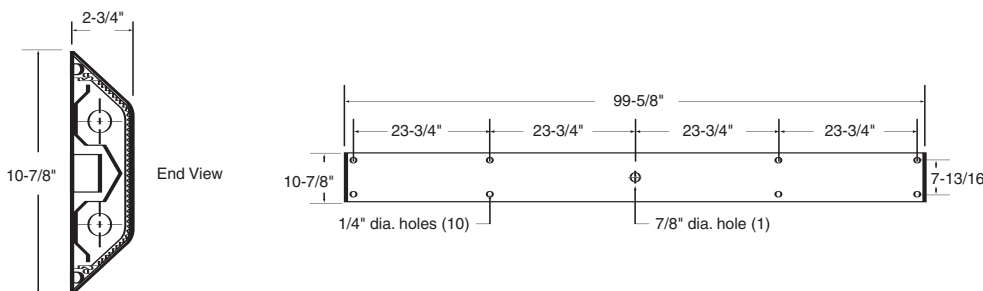

PRODUCT SPECIFICATIONS

- Marine-grade, extruded aluminum housing
- Tamper-resistant stainless steel hardware
- Architectural die-cast end caps
- Polyester powder, semi-gloss textured finish
- Standard color is white
- Fade-resistant color (custom colors available – consult factory)
- High-Efficiency T5, T5HO and T8 lamping
- Exceptionally high fixture efficiency
- 91.7% maintained lumens with high CRI of 85
- .156" thick extruded impact-resistant polycarbonate lens
- Delivers uniform illumination without glare
- Lens available in clear prismatic and opal prismatic
- Immediate hot re-strike
- Greater uniformity and instant-on capability
- No color shift
- Field drilling not required
- "LifeLyte" limited lifetime warranty
- UL/CUL listed for wet locations

UL Damp Location Listed.
UL File Number: E86021